


# SURFACE GRINDING SEGMENTS

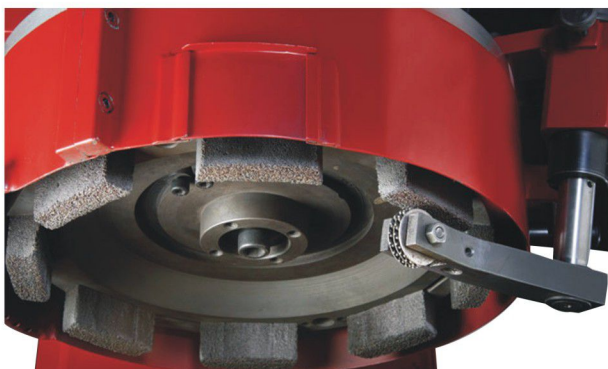

- ▶ Sterling surface grinding segments are generally used to grind flat stock or flat surfaces within a workpiece.
- ▶ Applications can vary from heavy, rapid stock removal to precision tolerance operations.
- ▶ Ideal for high stock removal on flat surfaces. Best for grinding hard material.

## International Range

### FEATURES

- High Performance, Self-sharpening, Ceramic alumina abrasive
- High Performance bond & induced porosity

### BENEFITS

- Fastest stock removal, Maximum productivity
- Cool cutting, Less burn on part
- Enhanced segment life
- Cool, free cut with excellent chip/coolant flow

## Premium Range

### FEATURES

- High Performance white aluminum oxide abrasive
- Premium vitrified bond with induced porosity

### BENEFITS

- Fast cool cutting action
- Long life with cool free cut

## International Range

2CG301 F16 VC8  
 3CG24-2 E12 V32  
 3CG24-2 E12 V32  
 3CG24-2 D12 V32

## Premium Range

PAA30 F18 VTRB  
 PAA46 D18 VTRB  
 PAA46 F18 VTRB  
 PAA30 H18 VSP

## Professional Range

AA30 F20 VTR  
 WA30 G18 VTR  
 WA30 I18 VTRB  
 DA54 H18 VC8  
 WA30 I18 VTRB  
 AA30 E20 VTR  
 WA30 H18 VTRB



**STERLING ABRASIVES LTD.**